

Combiner

824-894/1850-1990/1710-1755&2110-2155/2500-2690/3300-3800MHz

FEATURES


- Suitable for indoor and outdoor applications
- Wall or pole mounting



Technical Data

| Type No | | HT-PP-0838-43F |
|--------------------------|--------|----------------------------|
| Frequency range | Band 1 | 824-894 |
| | Band 2 | 1850-1990 |
| | Band 3 | 1710-1755&2110-2155 |
| | Band 4 | 2500-2690 |
| | Band 5 | 3300-3800 |
| Return loss/VSWR | | ≤-19dB/1.25 |
| Insertion loss(dB) | | ≤0.4 |
| Isolation(dB) | | > 60 |
| Impedance | | 50 Ω |
| Intermodulation products | | < -150 dBc (with 2 x 20 W) |
| Operation temperature | | -20 to +45 °C |
| Temperature range | | -40 to +55 °C |
| Connectors | | 4.3-Female |
| Application | | IP65 |
| Weight | | |
| Dimensions (W x H x D) | | 236*184*45mm |

Drawing

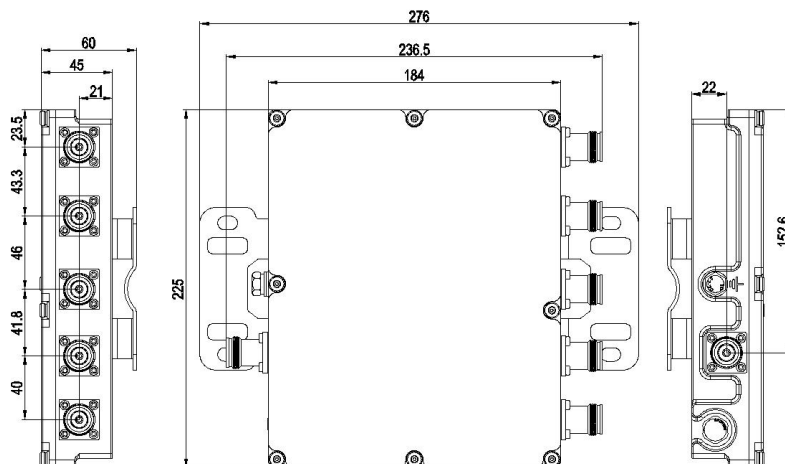

Address: 209-211, Building 1, Dayuan Industrial Zone, Houting Community, Shajing Street, Baoan District, Shenzhen

Mobile :+86 19826551792

Email :cherry@hutsin.com