


## 698-3800MHz MIMO Panel Antenna N-Female

### Electrical


Model No.	HT-PA-740-5/8-NF-150M		
Frequency(MHz)	698-960	1710-2700	3300-3800
Polarization	±45		
Gain (dBi)	7±1	8±1	8±1
Horizontal Beam width(°)	70±5	65±5	60±5
Vertical Beam width	65	60	55
Isolation(dB)	≥18	≥25	≥25
Front-To-Back Ratio	≥12	≥15	≥15
VSWR	≤2.0		
3rd PIM(dBc)	≤-150dBc@2*33dBm		
Total Input Power(W)	50		
Impedance (ohm)	50		
Lightning Protection	DC Ground		
Connector	N-Female*2		
Working Temp(deg)	-40~+55		
Antenna weight(kg)	TBD		
Radome Material	ABS (UV Stabilized)		
Dimensions(mm)	305*215*70		

### Antenna Pattern


Horizontal pattern

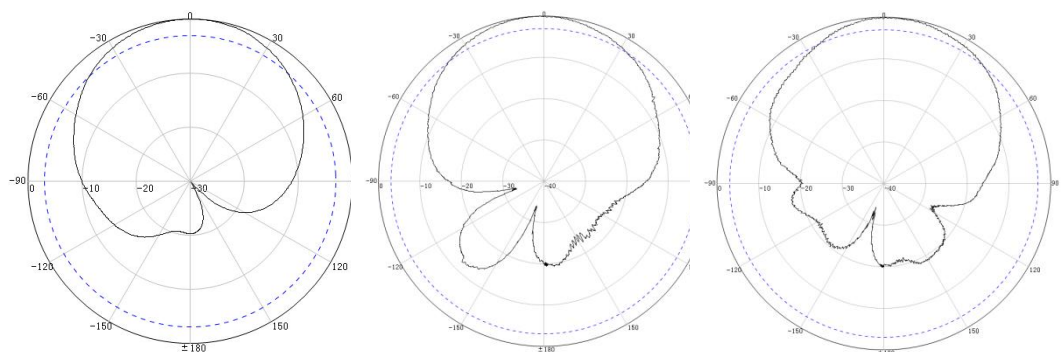


Vertical  
pattern

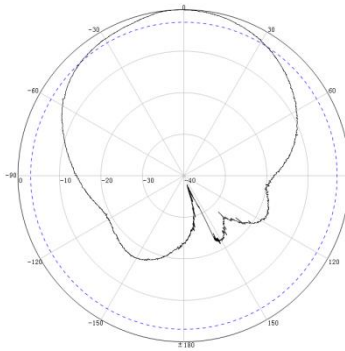

900MHz

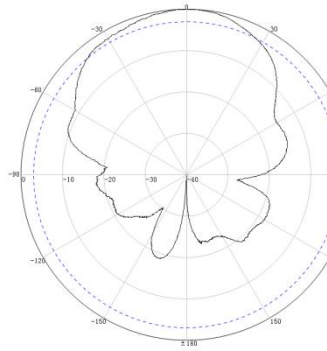

1710MHz

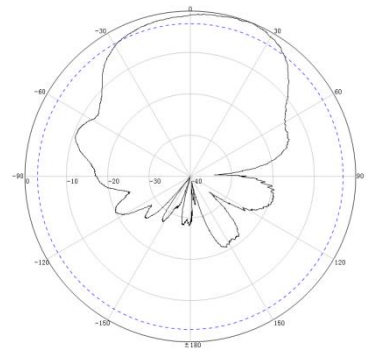

2500MHz

## Product Image

